

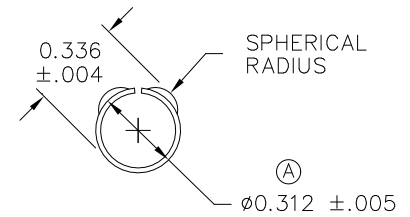

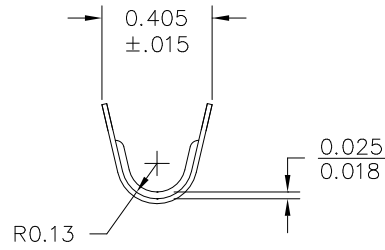


# CUSTOMER PRINT


FOR MAXIMUM PERFORMANCE AND RELIABILITY,  
ALWAYS USE ETCO ENGINEERED IGNITION TERMINALS  
WITH ETCO AUTOMOTIVE INSULATORS.

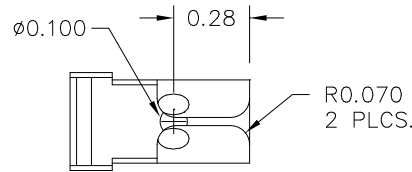

NOTE:  
PART MAY BE COATED WITH A LIGHT  
FILM OF LUBRICATION USED IN THE  
MANUFACTURING PROCESS.

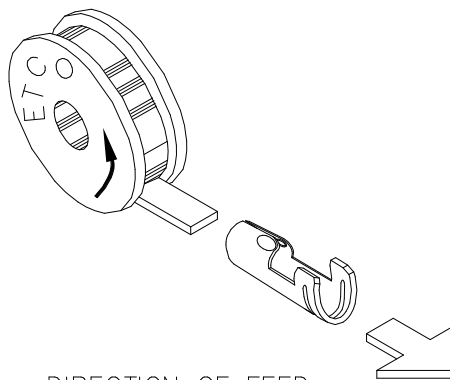

DIRECTION OF FEED  
FROM REEL  
TOWARD APPLICATION



REV.	DESCRIPTION	DATE	TOLERANCES UNLESS SPECIFIED	
			FRACTIONS ±	ANGLES ±
A	Ø.312±.005 WAS Ø.310±.002	3/25/94	.000 ± .005	± 2°
B	CORRECTED VIEW	2/16/95	.00 ± .010	
DO NOT SCALE DRAWING				
ETCO INCORPORATED AUTOMOTIVE DIVISION 3004 62ND AVENUE EAST BRADENTON, FLORIDA 34203 (941) 756-8426				
DISTRIBUTOR TERMINAL				
MATERIAL			.018 HB	DATE
				10-26-89
DRAWN BY	CHECKED BY	SCALE	PART NO.	
CNP		2:1 1:1	DT 124E	