

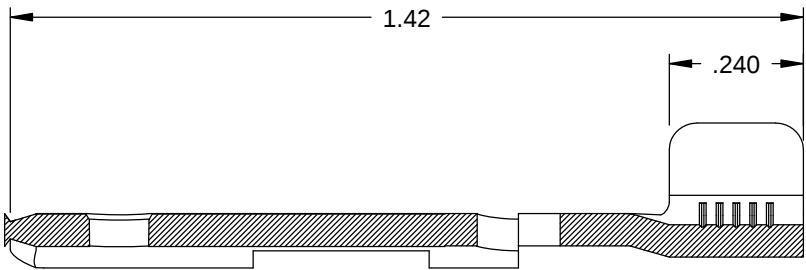
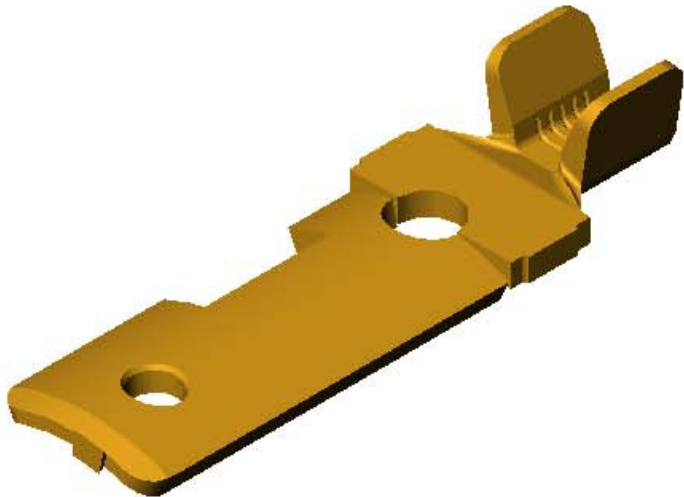



- NOTES:
- 1. MATERIAL: .058 THICK C26000 BRASS; 1/4 HARD, ANNEALED TO TEMPER, PER ETCO METAL CODE 07028.
 - 2. PARTS MAY BE COATED WITH A LIGHT FILM OF LUBRICATION USED IN THE MANUFACTURING PROCESS.
 - 3. WIRE RANGE: #10-#16 AWG.
 - 4. NEMA L5-20, 125 VOLTS-20 AMPS.

P/C	DESCRIPTION ⑤	MAT'L
82065	MALETLWIDE-C-HB	NOTE 1


Rev.	Description of Change/ SCN#	Date
1	TRANSFER FROM CP TO EP	10-6-04
2	SCN# 102798 SCJ	1-3-05
3	SCN# 102831 SCJ	1-24-05
4	SCN# 102981 SCJ	5-24-05
5	ECR# 816 SCJ	11-3-11

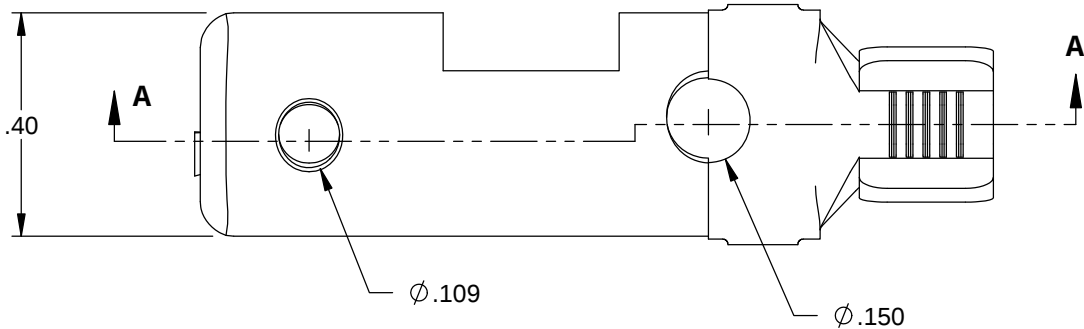


SECTION A-A
SCALE 3 : 1

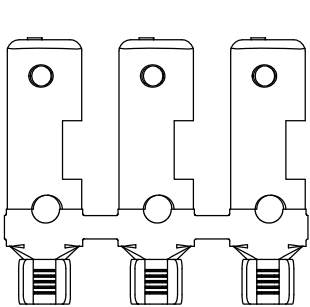


DIRECTION EXITING TOOL,
EARS UP, TO THE FRONT

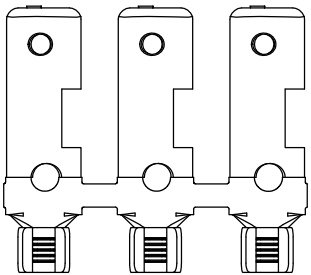

DIRECTION EXITING APPLICATOR,
FROM RIGHT
EARS UP, TO THE FRONT



UNCONTROLLED COPY



TOLERANCES UNLESS
OTHERWISE SPECIFIED

INCHES: .XX - $\pm .030$
.XXX - $\pm .015$

ANGLES - $\pm 5^\circ$

TOOL NO.
0837



Title:
MALE TWIST LOCK TERMINAL-WIDE: L5-20, 125 VOLTS-20 AMPS

DO NOT SCALE DWG.

ETCO Incorporated
Engineered Products
25 Bellows Street
Warwick, R.I. 02888
Phone: (401)467-2400
FAX: (401)467-9230
www.ETCO.com

Drawn By: C. O'REILLY

Chk'd/App'd By:

Date: 6/3/03

Scale:
3X

Size
B

Dwg. No.: **MALETLWIDE strip form**