

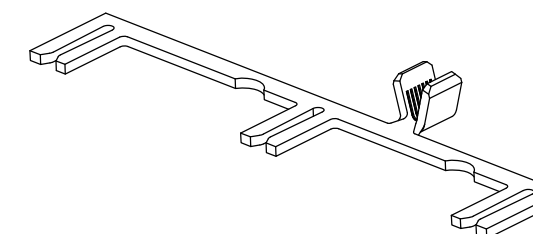


NOTES:

1. MATERIAL: .058 THICK C26000 BRASS; 1/2 HARD ANNEALED TO TEMPER PER ETCO METAL CODE 01075.
2. PARTS MAY BE COATED WITH A LIGHT FILM OF LUBRICATION USED IN THE MANUFACTURING PROCESS.
3. WIRE RANGE: #12 AWG.

P/C	DESCRIPTION	MAT'L
82224	1156-4-HB	NOTE 1

Rev.	Description of Change/ SCN#	Date
1	TRANSFERED FROM CP SCJ	8-3-08

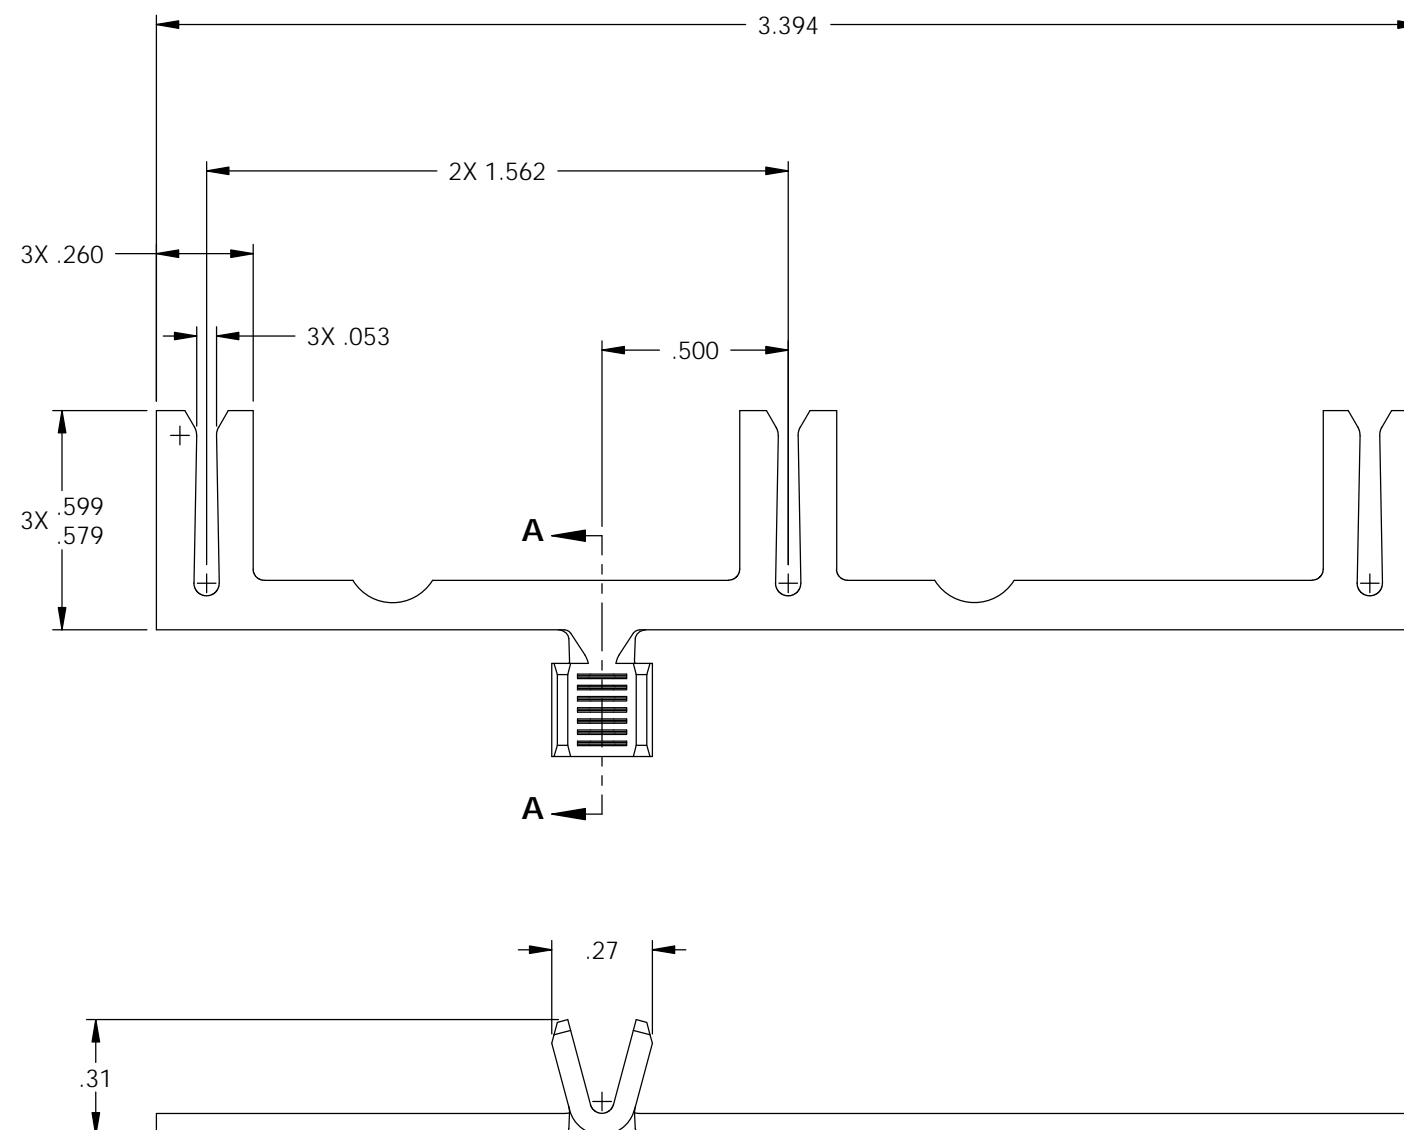

SECTION A-A

# UNCONTROLLED COPY

<p>THIRD ANGLE PROJECTION TOLERANCES UNLESS OTHERWISE SPECIFIED INCHES: .XX - ±.030 .XXX - ±.015 ANGLES: ±5°</p>	<p>TOOL NO. <b>0830</b></p>	<p>Title: <b>TRIPLE CONNECTOR</b></p>			
		<p>ETCO Incorporated Engineered Products 25 Bellows Street Warwick, RI 02888 Phone: (401) 467-2400 Fax: (401) 467-9230 www.ETCO.com</p>	<p>DO NOT SCALE DWG.</p>	<p>Drawn By: <b>S. JOHNSON</b></p>	<p>Date: <b>8-4-08</b></p>
		<p>Chk'd/App'd By:</p>	<p>Scale: <b>4X</b></p>	<p>Size <b>B</b></p>	<p>Dwg. No.: <b>1156-4 cust</b></p>