






NOTES:



1. MATERIAL: .016 THICK BRASS
#4 TEMPER (FULL HARD)
PER ETCO METAL CODE 00184.
2. MATERIAL: .016 THICK PRE-TINNED BRASS
#4 TEMPER (FULL HARD)
PER ETCO METAL CODE 01248.
3. MATERIAL: .016 THICK COPPER ALLOY C18080
eXTRA-SPRING TM08
PER ETCO METAL CODE 00341.
4. PARTS MAY BE COATED WITH A LIGHT FILM OF LUBRICATION USED IN THE MANUFACTURING PROCESS.
5. INSERTION/WITHDRAWAL FORCES ARE INDICATED ON THE QUALITY INSPECTION PLAN.
6. ALL CORNERS SHOWN MAY HAVE A .010 MAX RAD.
7. ACCEPTS MALE TAB: .032 X .250
8. WIRE RANGE: 18-22 AWG.
9. INSULATION RANGE: ϕ .100- ϕ .130.

P/C	DESCRIPTION	MAT'L		
07781	D265N-HB	NOTE 1	X	X
07782	D265N-THB	NOTE 2	X	X


Rev.	Description of Change/ SCN#	Date
4	REMODELED IN SOLIDWORKS ADDED DIMS SCJ ORG.ENG.DWG.DATE: 11-30-01	1-10-07
5	SCN-140360 JMR	5-9-08
5	ECR# 5430 SCJ	2/13/19

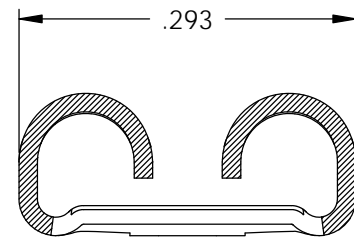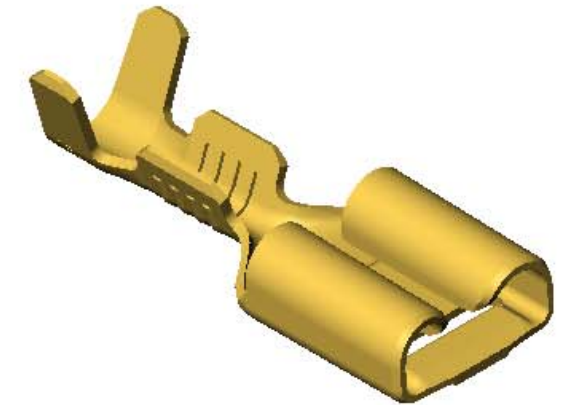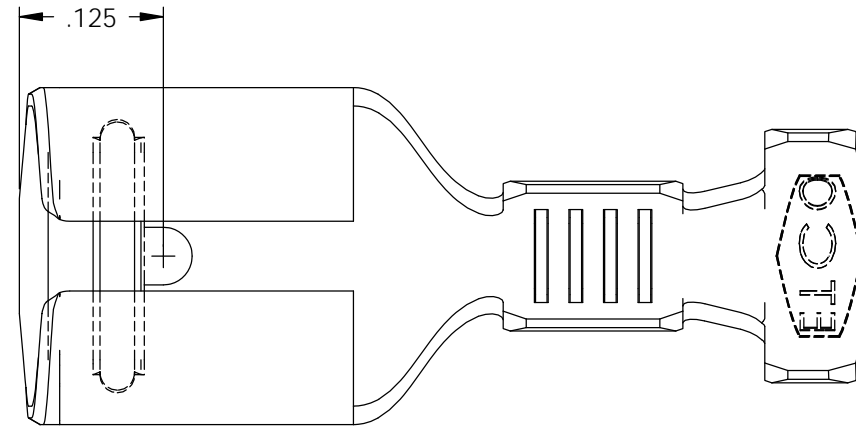


SECTION B-B
SCALE 6 : 1

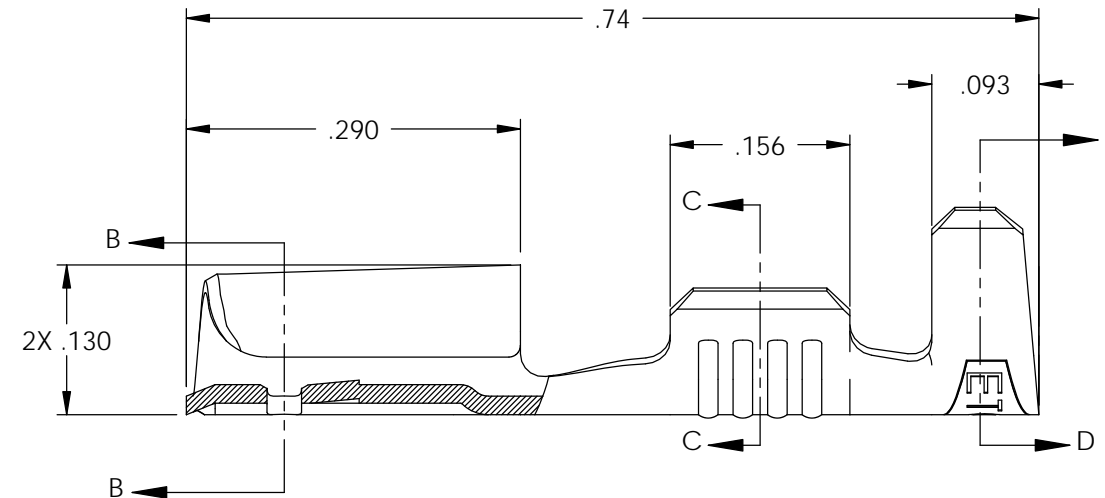




SECTION C-C
SCALE 6 : 1

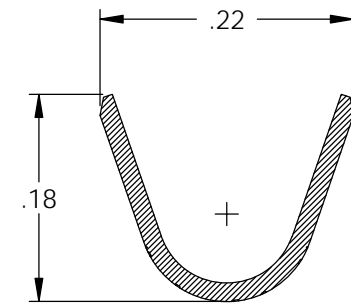

SECTION D-D
SCALE 6 : 1

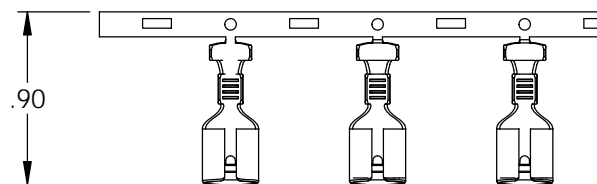

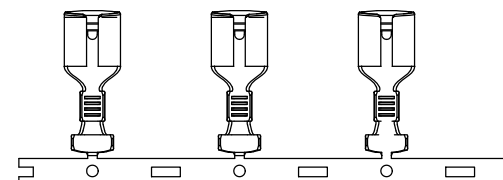

DIRECTION EXITING TOOL,
EARS UP, TO THE BACK



DIRECTION TOWARD APPLICATOR
EARS UP, TO THE FRONT,
FOR PARTS NOT INSULATED

UNCONTROLLED COPY

 THIRD ANGLE PROJECTION TOLERANCES UNLESS OTHERWISE SPECIFIED INCHES: .XX - \pm .030 .XXX - \pm .015 ANGLES: \pm 5°	TOOL NO. 0660	Title: .032 X .250 FEMALE DISCONNECT	
		DO NOT SCALE DWG. Drawn By: S.Johnson Date: 1-10-07	Chk'd/App'd By: Scale: 4X Size: B
		Dwg. No.: D265N cust	
		ETCO Incorporated Engineered Products 25 Bellows Street Warwick, RI 02888 Phone: (401) 467-2400 Fax: (401) 467-9230 www.ETCO.com	