

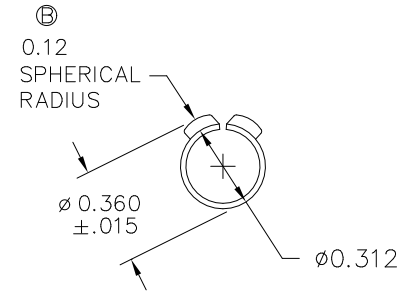
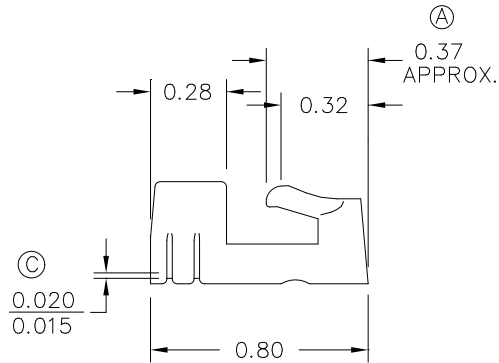
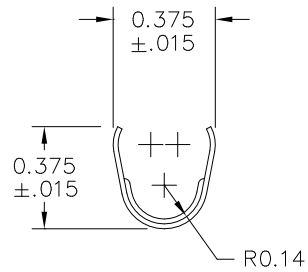


CUSTOMER PRINT


FOR MAXIMUM PERFORMANCE AND RELIABILITY,  
ALWAYS USE ETCO ENGINEERED IGNITION TERMINALS  
WITH ETCO AUTOMOTIVE INSULATORS.

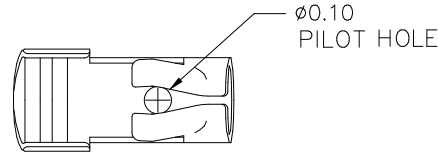

NOTE:  
PART MAY BE COATED WITH A LIGHT  
FILM OF LUBRICATION USED IN THE  
MANUFACTURING PROCESS.

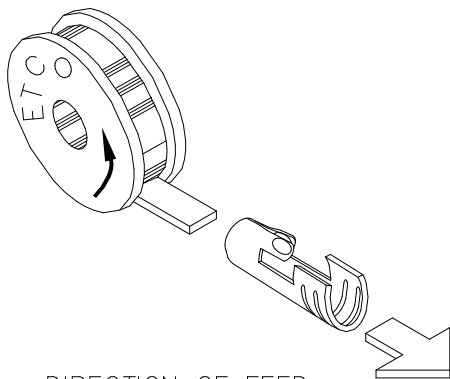

DIRECTION OF FEED  
FROM REEL  
TOWARD APPLICATION

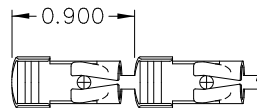

VIEW OF STRIP  
EXITING  
FROM TOOL

REV.	DESCRIPTION	DATE	TOLERANCES UNLESS SPECIFIED	
			.000 ± .005	FRACTIONS ±
A	0.37 WAS 0.430 APPROX.	6-20-88	.00 ± .010	ANGLES ± 2°
B	0.12 R WAS 0.06 R	10-18-88	DO NOT SCALE DRAWING	
C	0.015/.020 WAS .018/.025	8-9-90 CNP	<b>ETCO INCORPORATED</b> AUTOMOTIVE DIVISION 3004 62ND AVENUE EAST BRADENTON, FLORIDA 34203 (941) 756-8426	
			DISTRIBUTOR TERMINAL (7MM)	
			MATERIAL .018 HB. / 0.018 430SS	DATE 8-4-87
			DRAWN BY CNP	CHECKED BY SCALE 2:1 1:1 PART NO. DT15 E