


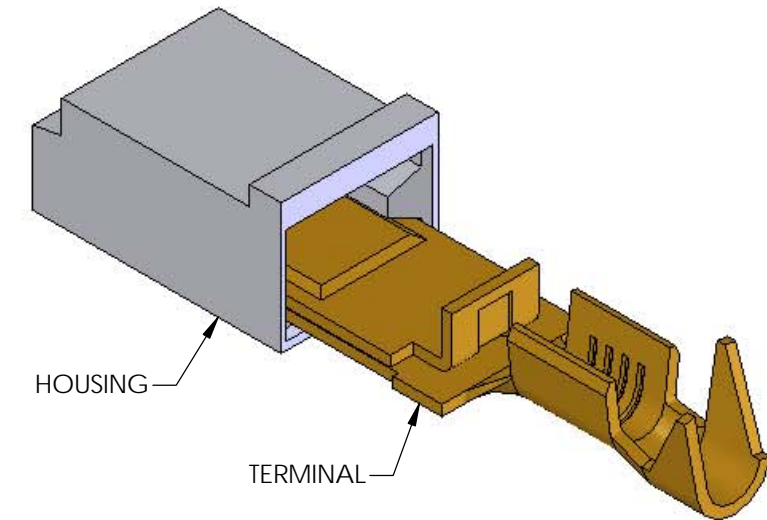




- NOTES:  
 1. WIRE RANGE: #14-#18 AWG.  
 2. INSULATION DIAMETER RANGE:  $\phi$ .120- $\phi$ .175.  
 3. THE MINIMUM FORCE TO REMOVE THE HOUSING FROM THE TERMINAL SHALL BE 1.0 POUNDS.

P/C	DESCRIPTION (2)	TERMINAL P/C	HOUSING P/C
37039	IGRJF2*C-HB	09877	81118

Rev.	Description of Change/ SCN#	Date
1	TRANSFERED FROM CP SCJ	8-26-08
2	ECR# 816 SCJ	11-8-11

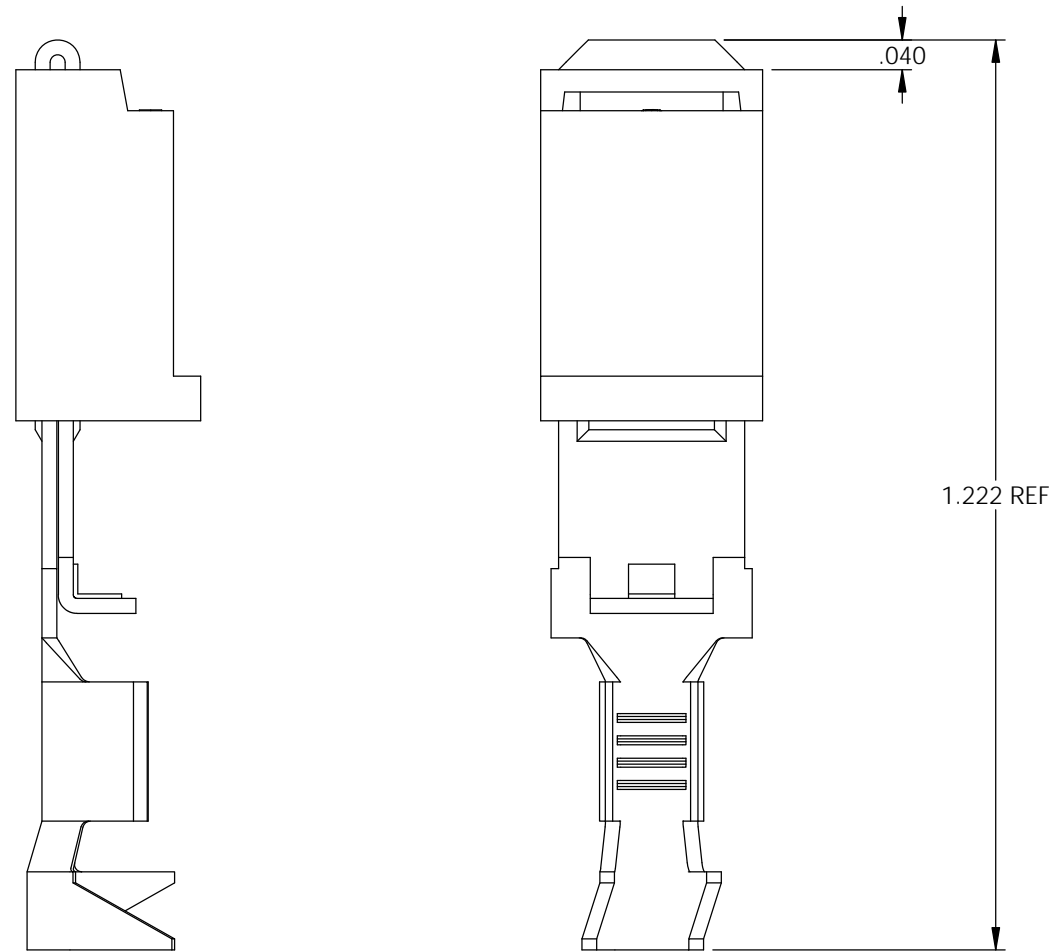

DIRECTION FROM ASSEMBLY MACHINE  
EARS UP, TO THE BACK



DIRECTION TOWARDS APPLICATOR  
EARS UP, TO THE FRONT

# UNCONTROLLED COPY

<p>THIRD ANGLE PROJECTION TOLERANCES UNLESS OTHERWISE SPECIFIED INCHES: .XX - <math>\pm</math>.030 .XXX - <math>\pm</math>.015 ANGLES: <math>\pm</math>5°</p>	<p>TOOL NO. <b>0903</b></p>	<p>Title: <b>INSULATED BLADE ASSEMBLY-P/C 37039</b></p>		
		<p>DO NOT SCALE DWG.</p>	<p>Drawn By: <b>S.JOHNSON</b></p>	<p>Date: <b>9-24-08</b></p>
<p>ETCO Incorporated Engineered Products 25 Bellows Street Warwick, RI 02888 Phone: (401) 467-2400 Fax: (401) 467-9230 www.ETCO.com</p>		<p>Chk'd/App'd By:</p>	<p>Scale: <b>4X</b></p>	<p>Size <b>B</b></p>
		<p>Dwg. No.: <b>IGRJF2 cust</b></p>		