

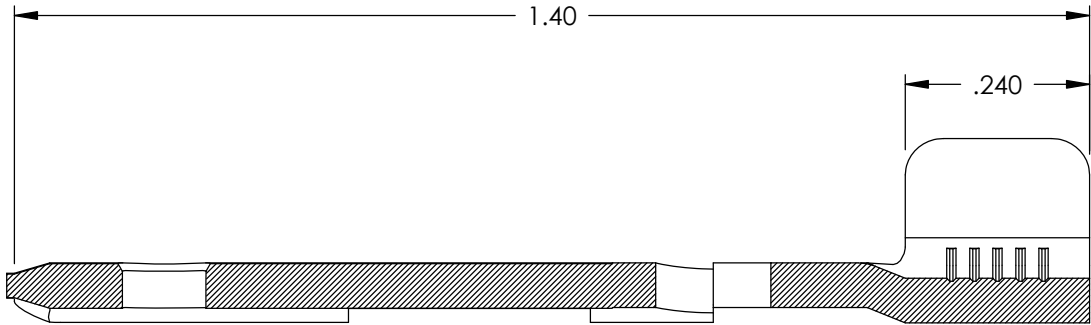

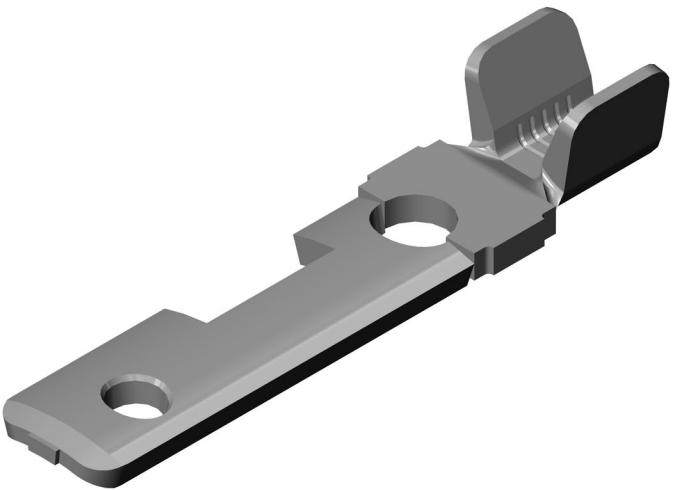



- NOTES:
- 1. MATERIAL: .058 THICK C26000 BRASS; 1/4 HARD, ANNEALED TO TEMPER, PER ETCO METAL CODE 07028.
 - 2. PARTS MAY BE COATED WITH A LIGHT FILM OF LUBRICATION USED IN THE MANUFACTURING PROCESS.
 - 3. WIRE RANGE: #10-#16 AWG.
 - 4. NEMA L5-20, 125 VOLTS-20 AMPS.

P/C	DESCRIPTION	MAT'L
82064	MALETLNRW-C-HB	NOTE 1



Rev.	Description of Change/ SCN#	Date
1	TRANSFER FROM CP TO EP	10-6-04
2	SCN# 102798 SCJ	1-3-05
3	SCN# 102831 SCJ	1-24-05
4	SCN# 102981 SCJ	5-24-05
5	ECR# 816 SCJ	11-3-11
6	ECR# 7156	5-25-23

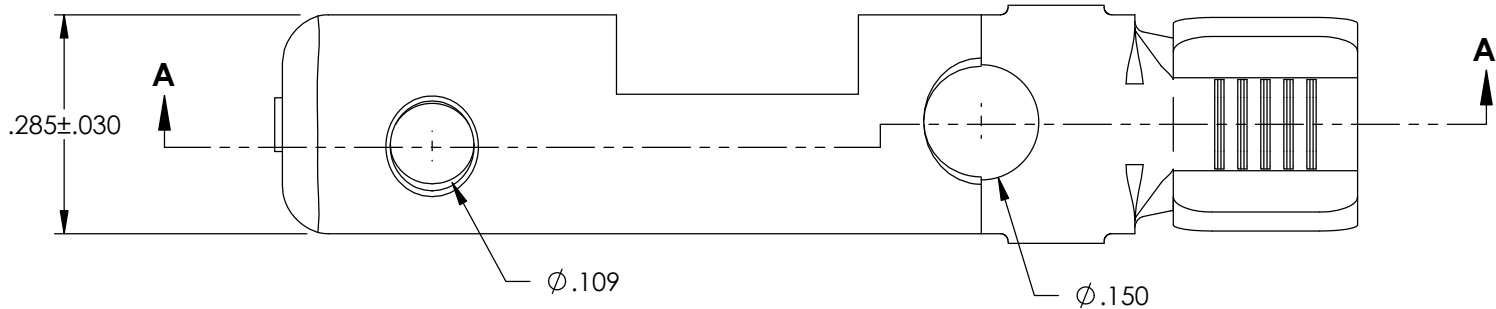


SECTION A-A




DIRECTION EXITING TOOL,
EARS UP, TO THE FRONT



DIRECTION TOWRD APPLICATOR,
FROM RIGHT,
EARS UP, TO THE FRONT



UNCONTROLLED COPY



THIRD ANGLE PROJECTION

TOLERANCES UNLESS
OTHERWISE SPECIFIED

INCHES: .XX - $\pm .030$
.XXX - $\pm .015$

ANGLES - $\pm 5^\circ$

TOOL NO.

0836



Title: MALE TWIST LOCK TERMINAL-NARROW:
L5-20, 125 VOLTS-20 AMPS

DO NOT SCALE DWG.

Drawn By: S.JOHNSON

Date: 10-6-04

Chk'd/App'd By:

Scale:
4X

Size
B

Dwg. No.:

MALETLNRW strip form