
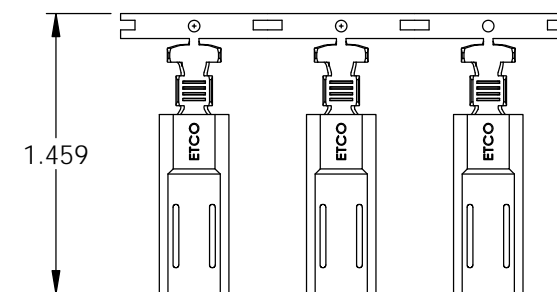

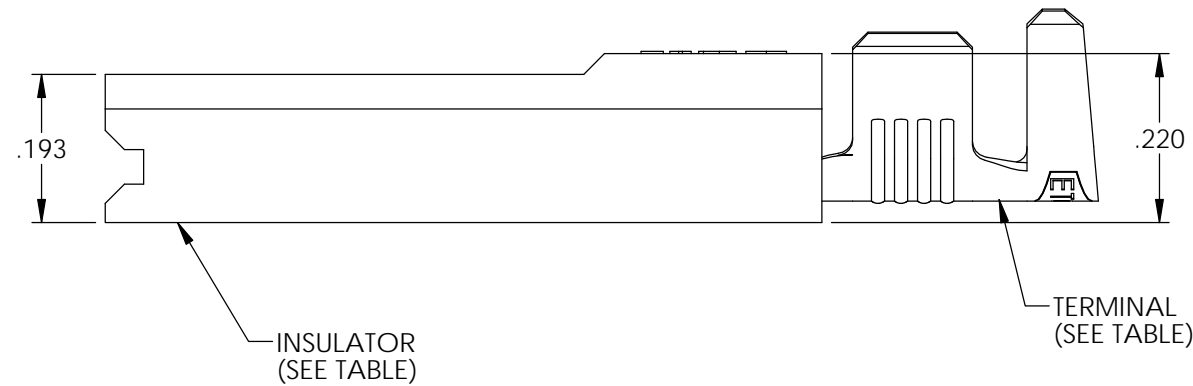
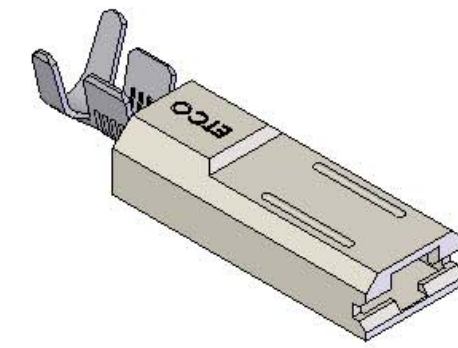




P/C	DESCRIPTION	TERMINAL P/C	TERMINAL MAT'L & FINISH	INSULATOR P/C	INSULATOR MAT'L	UL	UL
30160	PD263N-FR-HB	07956	BRASS	81122	6/6 NYLON FR	X	X
30165	PD263N-FR-THB	07957	PRE-TINNED BRASS	81122	6/6 NYLON FR	X	X
36011	PD263N-FR-THB-WPL	07957	PRE-TINNED BRASS	81122	6/6 NYLON FR	X	X

Rev.	Description of Change/ SCN#	Date
14	REMODELED IN SOLIDWORKS MOVED PD263N SERIES FROM PD260N & PD265N SERIES TO OWN DRAWING; EDITED UL CHART (TYPE-Os) SCJ	1-10-07
15	ECR# 766 SCJ	9/21/11
16	ECR# 1939 SCJ	1/21/13
17	ECR# 3327 SCJ	10/03/14
17	ECR# 3817 SCJ	7/16/15

- NOTES:
1.) ACCEPTED MALE: .032 X .250 TAB.
2.) WIRE RANGE: 10-14 AWG.
3.) INSUL RANGE: Ø .125-.180. (17)
4.) INSULATOR TEMP RATING: 150°C MAX. (16)
5.) VOLTAGE RATING: 600 V MAX, 1000 V MAX if used inside a fixture or sign. (17)

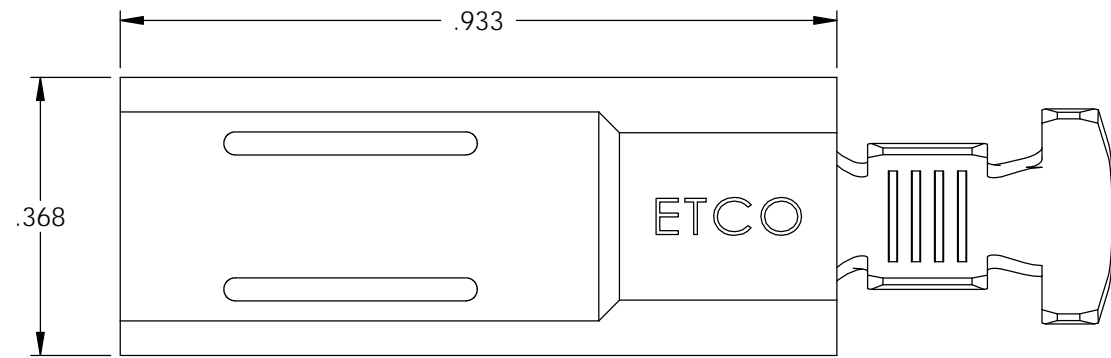

DIRECTION EXITING ASSEMBLY EQUIPMENT, EARS UP, INSULATOR TO THE FRONT

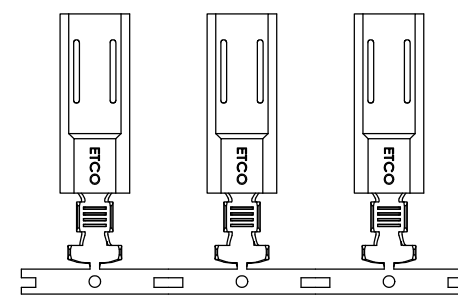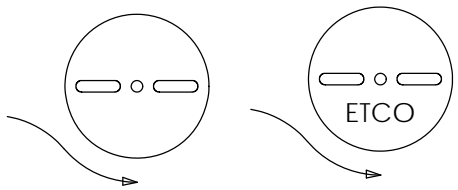

DIRECTION TOWARDS APPLICATOR, EARS UP, INSULATOR TO THE BACK

UNCONTROLLED COPY

<p>THIRD ANGLE PROJECTION TOLERANCES UNLESS OTHERWISE SPECIFIED INCHES: .XX - ±.030 .XXX - ±.015 ANGLES: ±5°</p>	<p>TOOL NO. 0797</p>	<p>Title: .032 X .250 INSULATED DISCONNECT ASSEMBLY</p>		
		<p>DO NOT SCALE DWG.</p>	<p>Drawn By: S.Johnson</p>	<p>Date: 1-10-07</p>
<p>ETCO Incorporated Engineered Products 25 Bellows Street Warwick, RI 02888 Phone: (401) 467-2400 Fax: (401) 467-9230 www.ETCO.com</p>		<p>Chk'd/App'd By:</p>	<p>Scale: 4X</p>	<p>Size B</p>
		<p>Dwg. No.: PD263N cust</p>		