
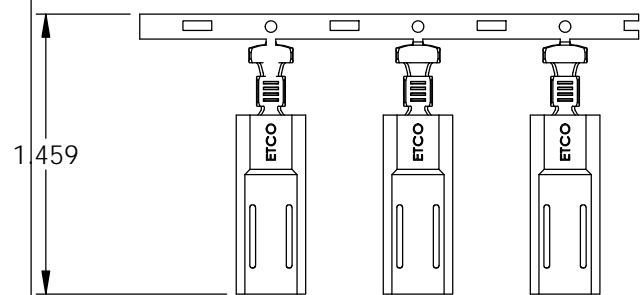

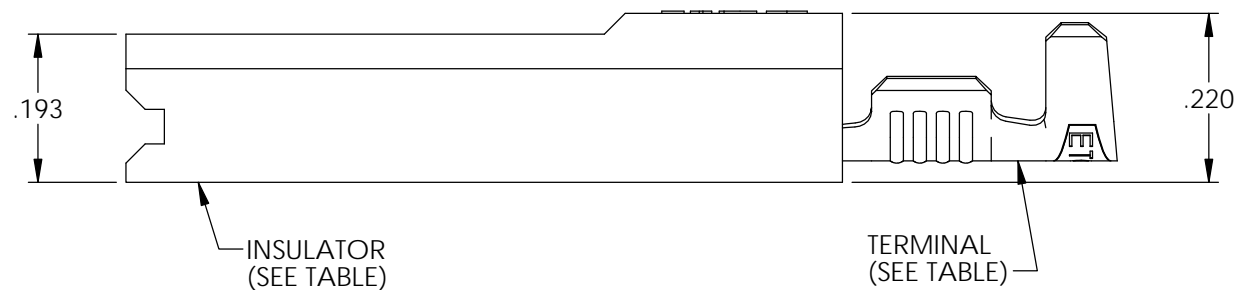
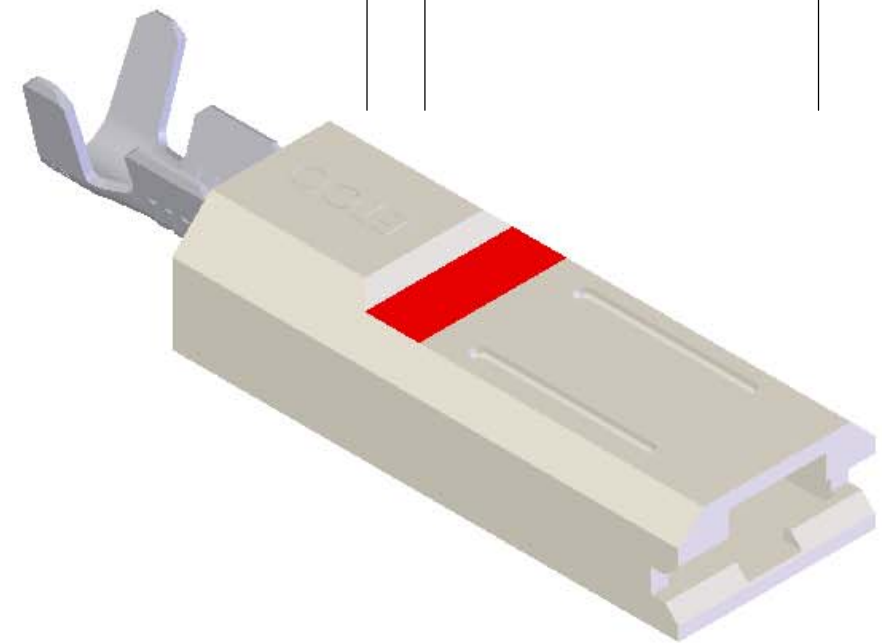




P/C	DESCRIPTION	TERMINAL P/C	TERMINAL MAT'L & FINISH	INSULATOR P/C	INSULATOR MAT'L		
30186	PD265N-FR-TPB	07992	PRE-TINNED PHOSPHOR BRONZE	81122	6/6 NYLON FR	X	X
30187	PD265N-FR-TPB-BLK	07992	PRE-TINNED PHOSPHOR BRONZE	81091	6/6 NYLON FR BLACK	X	X

Rev.	Description of Change/ SCN#	Date
-	INITIAL RELEASE SCJ	9/22/14
1	BLK was BLACK SCJ	2/18/15
2	ECR# 3649 SCJ	4/07/15
3	ECR# 3755 SCJ	6/11/15
3	ECR# 3817 SCJ	7/16/15
3	ECR# 5430 SCJ	2/13/19

- NOTES:
1.) ACCEPTED MALE: .032 X .250 TAB.
2.) WIRE RANGE: 18-22 AWG
3.) INSUL RANGE: Ø .100-.130
4.) A RED INK IDENTIFYING MARK IS TO BE APPLIED TO THE INSULATOR APPROXIMATELY (3) AS SHOWN.
5.) INSULATOR TEMP RATING: 150°C MAX.
6.) VOLTAGE RATING: 600 V MAX, 1000 V MAX if used inside a fixture or sign. (3)

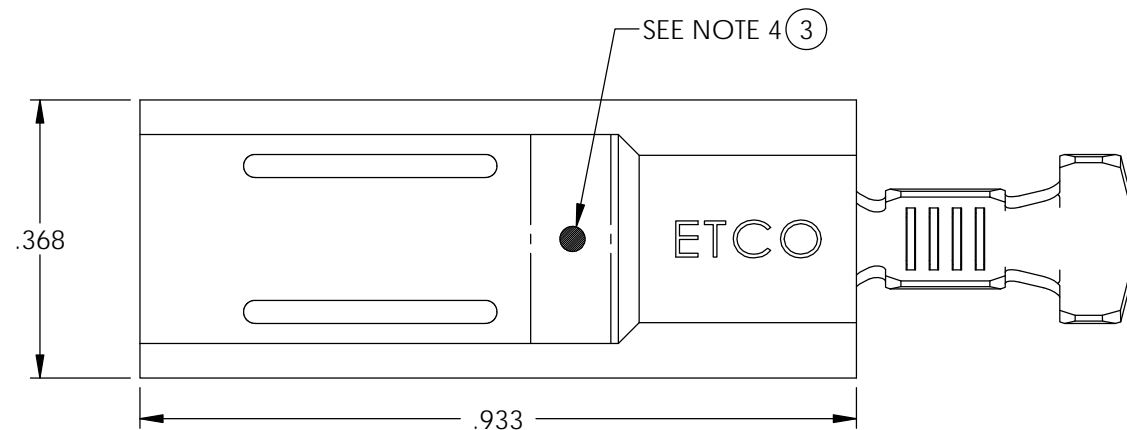

DIRECTION EXITING ASSEMBLY EQUIPMENT, EARS UP, INSULATOR TO THE FRONT

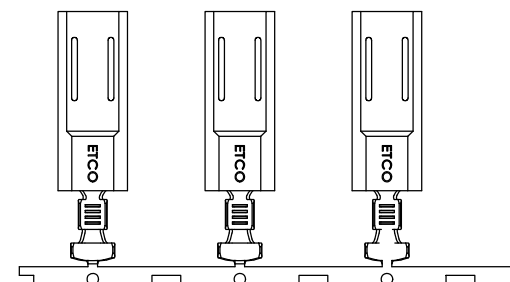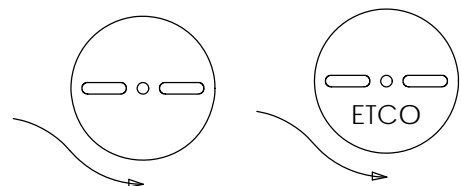

DIRECTION TOWARDS APPLICATOR, EARS UP, INSULATOR TO THE BACK

UNCONTROLLED COPY

 THIRD ANGLE PROJECTION TOLERANCES UNLESS OTHERWISE SPECIFIED INCHES: .XX - ±.030 .XXX - ±.015 ANGLES: ±5°	TOOL NO. 0660	Title: .032 X .250 INSULATED DISCONNECT ASSEMBLY	
	 ETCO	DO NOT SCALE DWG.	Drawn By: S.Johnson
ETCO Incorporated Engineered Products 25 Bellows Street Warwick, RI 02888 Phone: (401) 467-2400 Fax: (401) 467-9230 www.ETCO.com		Chk'd/App'd By:	Scale: 4X
		Dwg. No.: PD265N-TPB cust	