

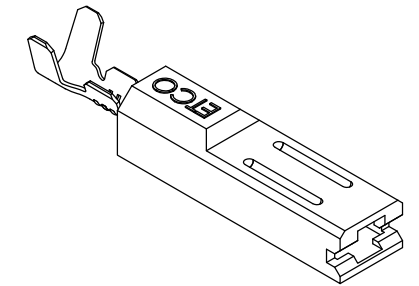
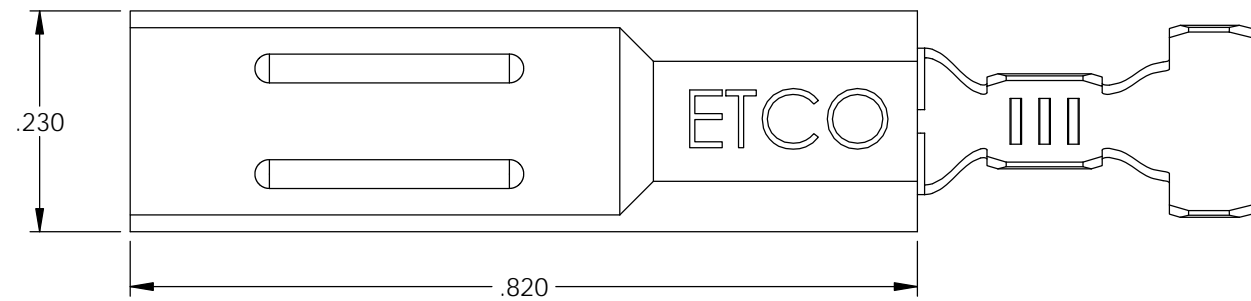





- NOTES:
 1.) ACCEPTED MALE: SEE CHART.
 2.) WIRE RANGE: 18-22 AWG.
 3.) INSUL RANGE: \varnothing .100-.130.
 4.) INSULATOR TEMP RATING: 150 °C MAX. (10)
 5.) VOLTAGE RATING: 600 V MAX,
 1000 V MAX if used inside a fixture or sign. (13)

P/C	DESCRIPTION	TERMINAL FINISH AND MAT'L	INSULATOR MAT'L	ACCEPTED MALE	
30220	PD60N-FR-HB	BRASS	6/6 NYLON FR	.032 X .110	X
30230	PD60N-FR-THB	PRE-TINNED BRASS	6/6 NYLON FR	.032 X .110	X
30240	PD62N-FR-HB	BRASS	6/6 NYLON FR	.020 X .110	X
30250	PD62N-FR-THB	PRE-TINNED BRASS	6/6 NYLON FR	.020 X .110	X
36016	PD60N-FR-THB-WPL	PRE-TINNED BRASS	6/6 NYLON FR	.032 X .110	X




Rev.	Description of Change/ SCN#	Date
6	SCN# 140187 SCJ ORG.ENG.DWG.DATE: 11-30-01	6-14-07
7	SCN# 140484 JMR	9-11-09
8	ECR #520 JMR	2-10-11
9	ECR #715 JMR	5-11-11
10	ECR# 1939 SCJ	1/21/13
11	ECR# 1985 SCJ	2/13/13
12	ECR# 2161 SCJ	4/22/13
13	Added Insulator dims SCJ	10/27/14
13	ECR# 3817 SCJ	7/16/15



SECTION A-A
SCALE 5 : 1

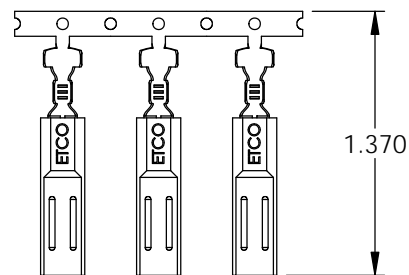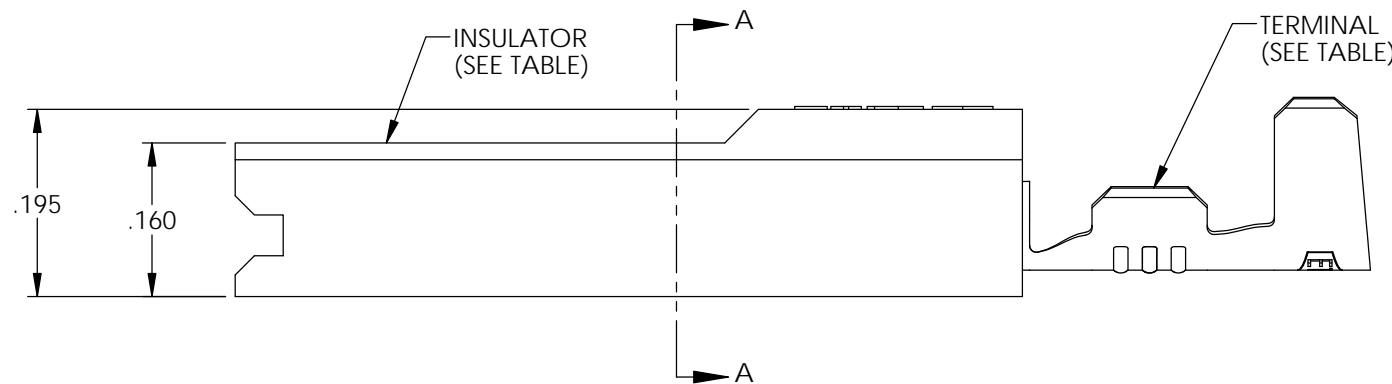



DIRECTION EXITING FROM LEFT SIDE
OF ASSEMBLY EQUIPMENT,
EARS UP, CARRIER TO THE FRONT

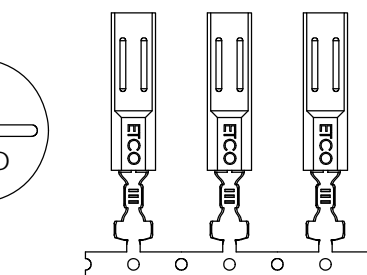

DIRECTION TOWARD APPLICATOR,
EARS UP, CARRIER TO THE FRONT

UNCONTROLLED COPY

 THIRD ANGLE PROJECTION TOLERANCES UNLESS OTHERWISE SPECIFIED INCHES: .XX - ±.030 .XXX - ±.015 ANGLES: ±5°	TOOL NO. 0794	Title: .110" INSULATED DISCONNECT ASSEMBLY	
		DO NOT SCALE DWG. ETCO Incorporated Engineered Products 25 Bellows Street Warwick, RI 02888 Phone: (401) 467-2400 Fax: (401) 467-9230 www.ETCO.com	Drawn By: S.JOHNSON Date: 1-4-07
		Dwg. No.: PD60N & PD62N cust	